

Industry Leading Business Solutions

nexora



HS-100 1D

PROFESSIONAL WIRED
BARCODE SCANNER






HS-100

1D LASER BARCODE SCANNER



Product Size

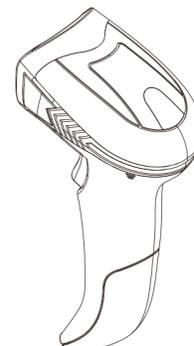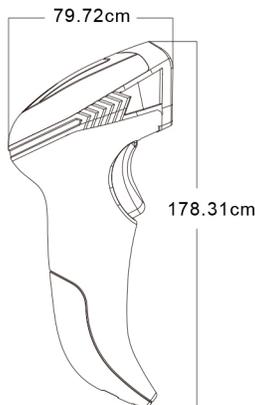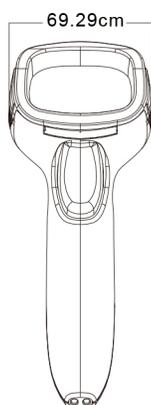

SPECIFICATIONS

Performance Parameters

Light Sources:	650nm laser (Safe visible laser diode)
Supported:	UPC- A, UPC-E, EAN-13, EAN-8, Codabar, Code 39, Code 39 Full ASCII, China Post, Plessey, MSI, Code 93, Code 128, Industrial 2 of 5, Interleave 2 of 5, Matrix 2 of 5, Code 39 extended, GS1 Limited, Aviation25, RSS 14.
Scan Type:	Single Laser
Scan Speed:	≥150 times/s
Scan Mode:	Manual/Continuous/Automatic Induction Scanning
Precision:	≥3mil
Depth of scan field:	10-280mm(0.33mm, PCS90%)
Scan Angle:	Yaw 55°, Rotation 30°, Pitch 65°
Error Rate:	1/5million
Interface:	USB-HID, USB-COM, RS232

Physical Parameters

Dimensions:	69mm*79mm*178mm
Weight:	128.5g
Material:	ABS+PC
Cable Length:	2M

Environmental Parameters

Operating Temperature:	-20°C~50°C
Storage Temperature:	-40°C~70°C
Relative Humidity:	5%~95% RH(Non-condensing)
Shock Resistance:	Withstands multiple times 3 meters drops to concrete

Electronic Parameters

Working Voltage:	DC5V±1%
Operating Current:	85mA

PRODUCT FEATURES

- New decoding chip for interpreting various 1D
- Scan 1D wrinkle, scratch bar code
- Withstand multiple 3 meters drops to concrete
- Plug and play, easy to set up and quickly match

